

# pizzaXpress



Model No.

**DXE-SS**

## Commercial Electromechanical Pizza Press

The DXE-SS commercial electromechanical pizza dough press is perfect for high production volumes (150-200/hr). It's heavy duty stainless steel construction and electric motor driven components make it the best semi-automatic press in the industry without the use of hydraulics or accessory air compressor. It is a mess free (no flour needed) alternative to hand tossing or sheeting/rolling your pizza dough. The dough press is an easy, affordable way to improve your production time, as well as your finished product. The DXE-SS is a swing way design with an upper heated platen.

### Variable Thickness Control

- makes it possible to achieve desired thickness and ensures consistent thickness at the same dough ball weight

### Heated Upper Platen:

- aids dough flow
- allows dough to be pressed straight from refrigeration unit
- helps keep dough from shrinking back
- keeps dough from sticking to upper platen
- will help activate yeast for faster proofing if desired

### Pressing Tips:

- Recommended Time:  
Warm dough, moderate to high yeast...2 seconds  
Cold dough, moderate yeast...4-6 seconds  
Cold dough, small amount of yeast...8 seconds
- Recommended Temperature:  
Warm dough...110°F  
Cold dough...150°F



### Production:

- 18" platen allows for making variable crust sizes and thickness up to 18 inches – the size of the crust is determined by the weight of the dough ball and the thickness setting.
- depends on the desired size of the crust...9" to 18" = 150-200/hr,  
7" to 9" = 300-400/hr,  
6" or under = 600-800/hr

### Finished Product:

- pressed dough keeps air in the crust vs. sheeted dough where the air is forced out of the crust. Pressed dough is consistent in thickness and size vs. hand tossed where the thickness and size can be inconsistent

### Labor:

- presses require no skilled labor unlike hand tossing
- presses are safe and have no age requirements unlike sheeters/rollers

### Use:

- DXE-SS is easy to use... prepare dough balls, set temp/thickness, place dough ball in center of lower platen, and press the dough.



**doughXpress**

**HIX Corporation Food Division**

Product improvement may require us to change specifications without notice.

Revised October 2017

**DOUGHXPRESS**

1201 E. 27th Terrace  
Pittsburg, KS 66762 USA

Toll Free: (800) 835-0606 ext.205

Tel: (620) 231-8568 ext.205

Fax: (620) 231-1598

[doughxpress@hixcorp.com](mailto:doughxpress@hixcorp.com) or visit [www.doughxpress.com](http://www.doughxpress.com)

# pizzaXpress



Model No.

**DXE-SS**

## Commercial Electromechanical Pizza Press

### Features Include:

- digital temperature control displays current reading
- digital timer (count down begins automatically when platen lowers and resets after the platen raises)
- full range thickness adjustment from paper thin to 7/8"
- bottom swing out design saves space and is easier to use than top swinging models
- illuminated On/Off switch
- two start buttons for hands clear operation
- heat indicating light that turns off when set temperature is reached
- flattens dough balls into pizzas up to 18" in diameter
- stainless steel exterior with aluminum upper and lower platens
- sleek, modern, durable, easy to clean design
- emergency stop button

### Optional Features:

- Non-stick PTFE coated upper and lower platens
- powder coated white finish

### Certifications:

- CE
- ETL Electrical Safety
- ETL Sanitation

### Recommended Cleaning Instructions:

- wipe down with a moist towel - if needed, use damp sponge with minimal soap and water and then dry off

### Customization:

- Customized upper and lower platens available. Contact Factory for details.

### DIMENSIONS

Width: 18 3/16 inches, 46.2 centimeters  
Height: 25-1/8 inches, 63.8 centimeters  
Depth: 24-11/16 inches, 62.7 centimeters

### WEIGHT


Shipping: 250 lbs.

### ELECTRICAL

120 Volt / 60 Hz  
1150 Watts  
10 Amps  
Standard 5-15P NEMA Plug

### TEMPERATURE RANGE

Off-200°F, 93°C upper platen

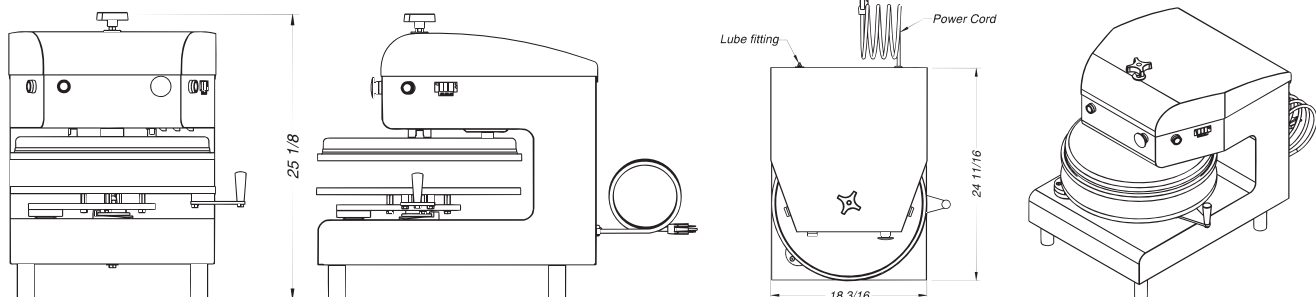

**doughXpress**

**HIX Corporation Food Division**

Product improvement may require us to change specifications without notice.

Revised October 2017

**DOUGHXPRESS**

1201 E. 27th Terrace  
Pittsburg, KS 66762 USA

Toll Free: (800) 835-0606 ext.205

Tel: (620) 231-8568 ext.205

Fax: (620) 231-1598

[doughxpress@hixcorp.com](mailto:doughxpress@hixcorp.com) or visit [www.doughxpress.com](http://www.doughxpress.com)